


Bullet Tag
Transponder
Special Form

PART ID:
1020-02-260-00

The bullet tag is a ferrite based product in a robust housing. It can be used in harsh environments

Main Specifications

Material	ABS
Operating Temperature	-20°C to 70°C
IP Class	IP67
Compliance	RoHs & Reach, CE
Key Features	Small Size, Versatile
Options	Other Chips On Request

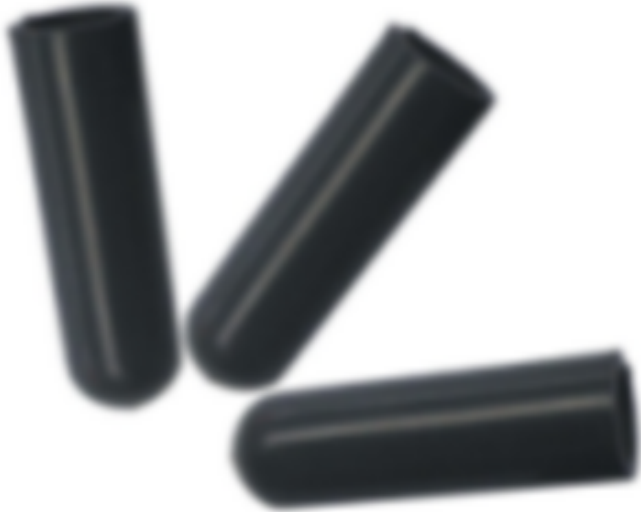

Chip Specification (Chip 260)

Chip	NXP - ICODE SLIX
Frequency	13.56 MHz (HF)
Memory	UID 8 Byte; User 1024 Bit
Norm	ISO/IEC 15693 & 18000-3

Full Specifications

Product ID	1020
Name	Bullet Tag
Material	ABS
Shape	Potted
Long Description	The bullet tag is a ferrite based product in a robust housing. It can be used in harsh environments
Key Features	Small Size, Versatile
Options	Other Chips On Request
Main Use	Embeddable RFID
Article Type	Special Form
Color	Black
Diameter [mm]	3.5
Length [mm]	15
Weight [g]	0.5
Operating Temp °C (min)	-20

®TECTUS reserves the right to change any information or data in this document without prior notice. The distribution and the update of this document is not controlled. TECTUS declines all responsibility for the use of products with any other specifications but the ones mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification.

Operating Temp °C (max)	70
Storage Temp °C (min)	-20
Storage Temp °C (max)	70
IP Class	IP67
Chemical Resistance	Not Specified
Flame Resistance	Not Specified
Mechanical Resistance	Not Specified
Attachment Method	Embed
Compliance	RoHs & Reach, CE

VARIANTS AND ICS

ID	Variant	Band	Type	ISO
1020-01-260-00	3.5x15mm	HF	ICODE SLIX	ISO/IEC 15693 & 18000-3
1020-02-260-00	5x16mm	HF	ICODE SLIX	ISO/IEC 15693 & 18000-3

®TECTUS reserves the right to change any information or data in this document without prior notice. The distribution and the update of this document is not controlled. TECTUS declines all responsibility for the use of products with any other specifications but the ones mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification.