


# Transponder ON METAL

## Special Form

PART ID:  
**2059**

### Main Specifications

Frequencies	<b>LF HF UHF</b>
Material	Stainless Steel
Operating Temperature	-20°C to 85°C
IP Class	IP68
Compliance	RoHs & Reach, CE, Rain RFID
Key Features	Rough Environment, Durable Housing, Versatile

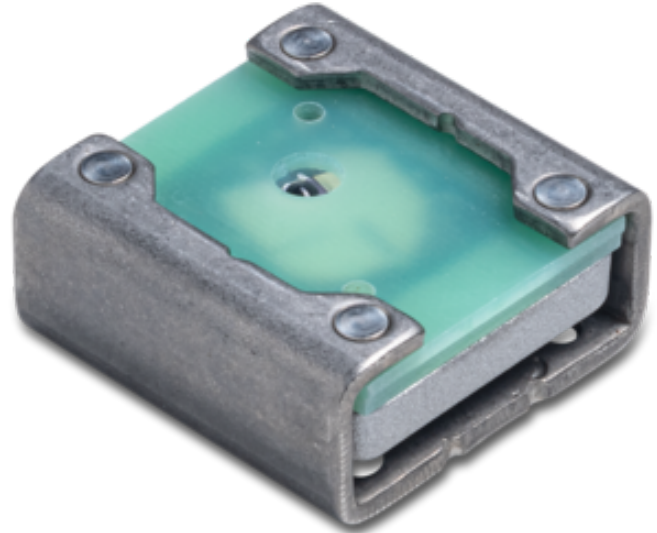

### Full Specifications

Product ID	2059
On Metal Use	yes
Material	Stainless Steel
Shape	X-Shape
Key Features	Rough Environment, Durable Housing, Versatile
Article Type	Special Form
Color	Silver
Length [mm]	36
Width [mm]	31.3
Thickness [mm]	16.5
Weight [g]	69.5
Operating Temp °C (min)	-20
Operating Temp °C (max)	85
Storage Temp °C (min)	-20
Storage Temp °C (max)	85
IP Class	IP68
Chemical Resistance	Not Specified

®TECTUS reserves the right to change any information or data in this document without prior notice. The distribution and the update of this document is not controlled. TECTUS declines all responsibility for the use of products with any other specifications but the ones mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification.

Flame Resistance	Not Specified
Mechanical Resistance	Not Specified
Attachment Method	Cable tie
Compliance	RoHs & Reach, CE, Rain RFID

## VARIANTS AND ICS

ID	Variant	Band	Type	ISO
2059-01-362-00	36.5x36.5x16.5mm	UHF	Monza 4QT	ISO 18000-6C / EPC Gen2 V2