

Transponder ON METAL


Special Form

PART ID:

2059-01-362-00

Main Specifications

Material	Stainless Steel
Operating Temperature	-20°C to 85°C
IP Class	IP68
Compliance	RoHs & Reach, CE, Rain RFID
Key Features	Rough Environment, Durable Housing, Versatile

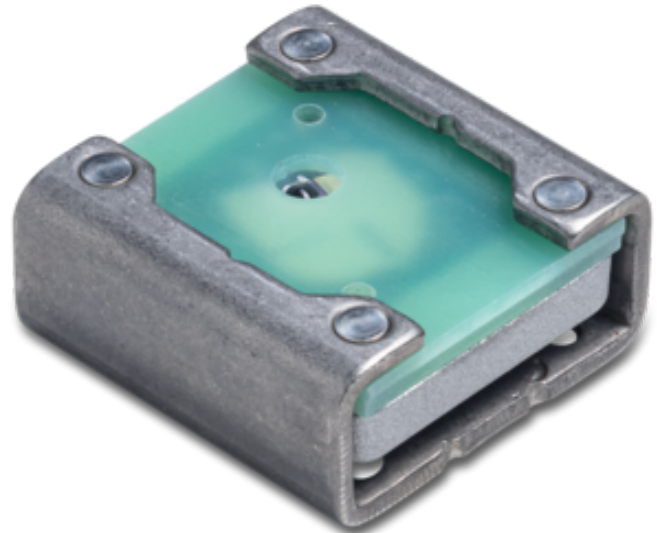

Chip Specification (Chip 362)

Chip	Impinj - Monza 4QT
Frequency	860~960 MHz (UHF)
Memory	TID 32 Bit; EPC 128 Bit; User 512 Bit
Norm	ISO 18000-6C / EPC Gen2 V2

Full Specifications

Product ID	2059
On Metal Use	yes
Material	Stainless Steel
Shape	X-Shape
Key Features	Rough Environment, Durable Housing, Versatile
Article Type	Special Form
Color	Silver
Length [mm]	36
Width [mm]	31.3
Thickness [mm]	16.5
Weight [g]	69.5
Operating Temp °C (min)	-20
Operating Temp °C (max)	85
Storage Temp °C (min)	-20
Storage Temp °C (max)	85

®TECTUS reserves the right to change any information or data in this document without prior notice. The distribution and the update of this document is not controlled. TECTUS declines all responsibility for the use of products with any other specifications but the ones mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility.

Where application information is given, it is only advisory and does not form part of the specification.

IP Class	IP68
Chemical Resistance	Not Specified
Flame Resistance	Not Specified
Mechanical Resistance	Not Specified
Attachment Method	Cable tie
Compliance	RoHs & Reach, CE, Rain RFID

VARIANTS AND ICS

ID	Variant	Band	Type	ISO
2059-01-362-00	36.5x36.5x16.5mm	UHF	Monza 4QT	ISO 18000-6C / EPC Gen2 V2