

# Transponder PEAKID ATEX HT

Transponder ATEX  
Special Form

PART ID:

**3038-01-152-00**

## Main Specifications

Material	PEEK
Operating Temperature	-45°C to 60°C
IP Class	IP68
Compliance	RoHs & Reach, CE
Key Features	IN-Metal Use, Heat Tolerant, High Durability

## Chip Specification (Chip 152)

Chip	EM Marin - EM4200/Unique
Frequency	125 kHz ( LF )
Memory	UID 64 Bit; Read only
Norm	ISO/IEC 11784/85 Compatible

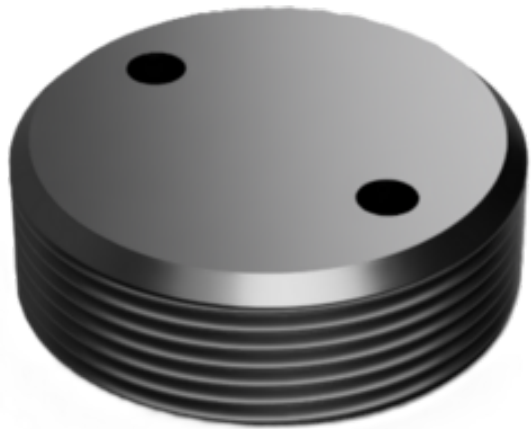


Image may differ from actual product

## Full Specifications

Product ID	3038
Name	Transponder PEAKID ATEX HT
Atex	yes
On Metal Use	yes
PEAK Performance	yes
Material	PEEK
Shape	Overmolded
Key Features	IN-Metal Use, Heat Tolerant, High Durability
Article Type	Special Form
Color	Black
Diameter [mm]	23.8
Thickness [mm]	10
Weight [g]	5

© 2025 TECTUS Technology GmbH. All rights reserved.

The content, design, and technical data of this specification are the intellectual property of TECTUS. TECTUS reserves the right to change any information or data in this document without prior notice. TECTUS declines all responsibility for the use of products with any other specifications, but the ones mentioned above. Any additional requirement for a specific customer application must be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification.

Hole	yes
Operating Temp °C (min)	-45
Operating Temp °C (max)	60
Storage Temp °C (min)	-45
Storage Temp °C (max)	60
IP Class	IP68
Chemical Resistance	Not Specified
Flame Resistance	Not Specified
Mechanical Resistance	IEC 68.2.27/ IEC 68.2.6
Attachment Method	Screw/Rivet
Compliance	RoHs & Reach, CE

## VARIANTS AND ICS

ID	Variant	Band	Type	ISO
3038-01-152-00	M24x10mm	LF	EM4200/Unique	ISO/IEC 11784/85 Compatible