

# TITAN


## RFID Reader Industry OEM Board

**PART ID:**  
**4004**

The LF RFID OEM Reader Board USB TITAN 4004 supports the Multiprotocol FDX-B and HDX functionality related to ISO/IEC 11784/785 / BDE standard. The TITAN 4004 is used by electronics developers to integrate LF RFID reading functionality into own devices. Target applications are the waste management and the animal identification or other industrial applications. The small shape allows the integration in handheld PDAs or tablet PCs. A good read range is available even if the reader board is of small shape.

### Main Specifications

Frequencies	<b>LF</b> HF UHF
Material	FR4
Operating Temperature	-20°C to 65°C
IP Class	Not Specified
Compliance	RoHs & Reach, CE
Key Features	Small Size, Command Interpreter, ASK/FSK Modulation

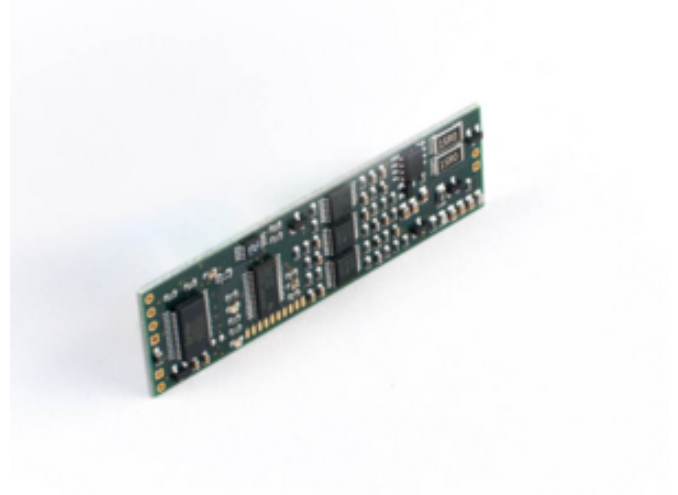

### Full Specifications

Product ID	4004
Name	TITAN
Material	FR4
Shape	Short Range
Long Description	The LF RFID OEM Reader Board USB TITAN 4004 supports the Multiprotocol FDX-B and HDX functionality related to ISO/IEC 11784/785 / BDE standard. The TITAN 4004 is used by electronics developers to integrate LF RFID reading functionality into own devices. Target applications are the waste management and the animal identification or other industrial applications. The small shape allows the integration in handheld PDAs or tablet PCs. A good read range is available even if the reader board is of small shape.
Key Features	Small Size, Command Interpreter, ASK/FSK Modulation
Main Use	Waste Management
Article Type	OEM Board
Color	Green
Length [mm]	70

®TECTUS reserves the right to change any information or data in this document without prior notice. The distribution and the update of this document is not controlled. TECTUS declines all responsibility for the use of products with any other specifications but the ones mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification.

Width [mm]	20
Thickness [mm]	8
Weight [g]	15
IP Class	Not Specified
PCB Material	FR4
Chemical Resistance	Not Specified
Flame Resistance	Not Specified
Mechanical Resistance	Not Specified
Compliance	RoHs & Reach, CE
Read / Read Write	Read&Write
Operating Temp °C (min)	-20
Operating Temp °C (max)	65
Storage Temp °C (min)	-20
Storage Temp °C (max)	65
Power Supply	USB
Battery Type	none
Battery Capacity	none
Operating Frequency	LF
Frequency Range	125 - 134 kHz
Current Consumption	80mA
Power over Ethernet [PoE]	none
Interfaces Physical	USB
Interfaces Protocol	ASCII
Transfer rate [Baud]	9600
Antenna Ports	1
Antenna ext.	1
Firmware Update User	yes
Integrated RFID Reader	LF
Development Tools	API
Mounting Method	Embedd

## VARIANTS

ID	Variant
4004-01-000-00	LF Read/Write